


# SAFE 3



## NON-CONTACT BODY TEMPERATURE SCANNER

Protect and secure your school,  
workplace and/or organization.

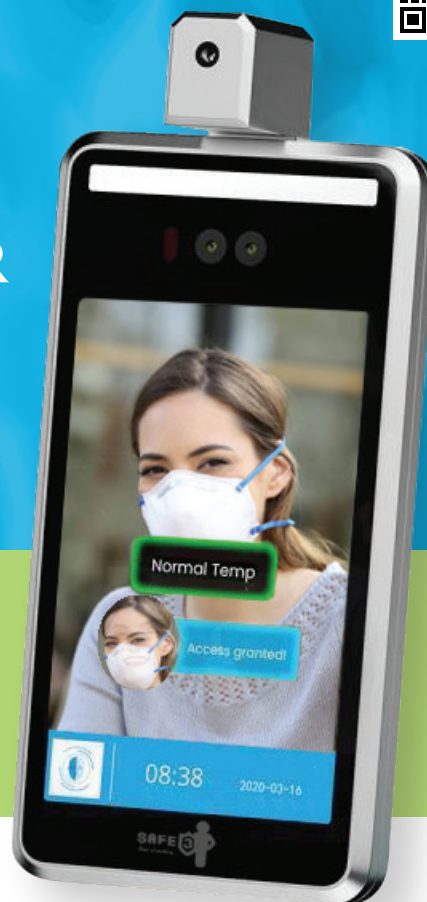

## SAFE 3 // NON-CONTACT BODY TEMPERATURE SCANNER

Protect and secure your school, workplace and/or organization. The Safe 3 non-contact body temperature scanner will help to ensure employee and customer health, security and well-being. By reducing the risk to students, staff members, employees and customer exposure to Covid-19, **ICAS®** is helping America get back to work. Body temperature scanners are the perfect solution for non-contact temperature screening as the Safe 3 allows organizations the capability to quickly and accurately detect body temperature.

The employee or customer simply walks up to the Safe 3 scanner and in typically less than one second the units can:


- Take the individuals temperature
- Display a visual and/or audible pass or fail signal that is safe or unsafe for the individual to remain in the facility
- Optional, facial recognition that can identify the person through technology that compares them to a secure database in the cloud so that your company's HR department and security team can keep a log of the data

The Safe 3 is available as a floor standing kiosk, wall mount or a desk stand.


### KEY FEATURES

- Non-contact temperature measurement
- Temperature measuring range: 30 °C to 45 °C (86 °F to 113 °F)
- Accuracy: 0.1 ° C, Deviation: ± 0.3 °C, Face recognition distance: 0.3 to 1.5 m
- Voice prompt will be triggered and door status (open/close) can be configured when detecting abnormal temperature
- Face recognition duration < 0.5 s per face, face recognition accuracy rate ≥99%
- 24,000 face capacity, 160,000 event capacity
- Displays temperature measurement results on the authentication page
- 8 Inch IPS HD display, video lag-free, ghost-free
- Suggested height for face recognition: between 3'9" and 7'2"
- Support TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, SMTP, UPNP, MQTT protocols on Window/Linux OS
- Support I/O, WG26, WG34, RJ45, USB, RS485 interfaces
- MTBF > 50000h

## DIMENSION

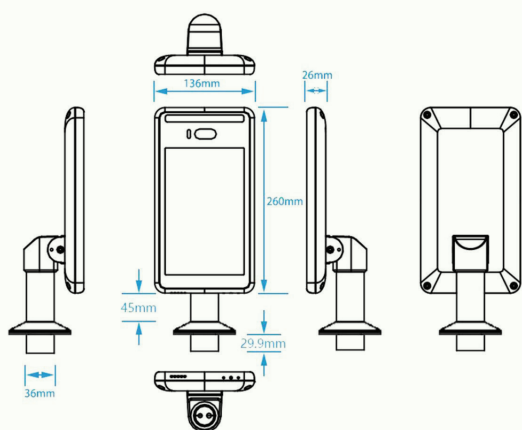

## INTERFACE

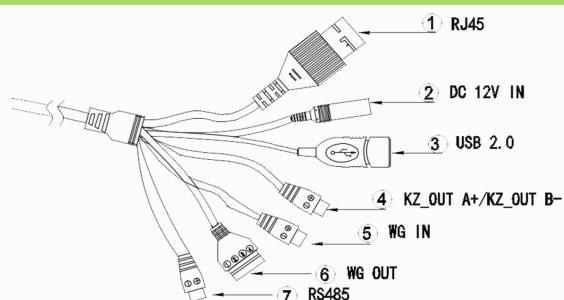

No.	Interface	Number	Notes
1	Internet	1	RJ45
2	Power	1	DC12V In
3	USB	1	USB 2.0
4	Alarm out	1	Switch mode signal A+/B-
5	Wiegand in	1	
6	Wiegand out	1	
7	RS485	1	

## ATTENTION

1. System should be installed in a room with room temperature between 60.8 °F-104°F, no air flow
2. Personnel entering the room from a cold outdoor environment will affect the temperature measurement accuracy
3. Start testing 10mins after powering on wait until the sensor temperature and environment temperature come stable.
4. Keep heater/AC 3m away from the system.
5. The forehead temperature test should be performed after the forehead is unobstructed for three minutes and the temperature is stable.
6. Temperature could vary because of humidity, blower and spray.
7. When there is water, sweat, oil or thick makeup on the forehead or the elderly have more wrinkles, the read temperature will be lower than the actual temperature.
8. The temperature read by the temperature measuring device is the temperature in the forehead area. Make sure there is no hair or clothing covering.

SAFE3 // By ICAS® Corp.



HELP PREVENT THE SPREAD



AI-BASED FEVER DETECTION



DETECT ONE OF THE SYMPTOMS



[www.safe3usa.com](http://www.safe3usa.com)

SAFE 3 - By ICAS® Corp. is not a medical device. It cannot detect COVID-19 or ensure that no one carrying the virus will enter the workplace.



**ONE-STOP  
SINGLE SOURCE  
TECHNOLOGY  
PROVIDER**

For all of your business  
technology needs from  
security surveillance to project  
management services, cabling  
solutions and more.

**ALL OUR  
SERVICES ON**  
[www.icascorp.com](http://www.icascorp.com)  
**OR MESSAGE US**  
[askus@icascorp.com](mailto:askus@icascorp.com)

**INTERFACE CABLE  
ASSEMBLIES &  
SERVICES CORP.**

42-19 23<sup>RD</sup> Ave  
LONG ISLAND CITY,  
NY 11105

M: 516 641 1490  
O: 718 278 1100  
O: 800 247 5203



## SPECIFICATION

System		Basic	
Processor	Dual-core processor	Display	8 inch display
Operating System	Embedded Linux	Camera	Dual-lens
Internet Protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, SMTP, UPNP, MQTT	Sensor	1/2.8" 2MP Progressive Scan CMOS
Interoperability	ONVIF, GB28181	WDR	120dB
Temperature Measurement		Light Compensation	Auto white light Auto IR light
Temperature Range	30 °C to 45 °C (86 °F to 113 °F)	Interface	
Sensor	Medical grade sensor imported from Europe	Ethernet	1 RJ45 10M/100M Ethernet port
Measurement Deviation	±0.3℃	Alarm Output	1 (Switch quantity)
Measurement Accuracy	0.1℃	Wiegand	1 input, 1 output
Measuring Distance	≤30cm	USB	1 USB2.0 port
Response Speed	300ms	RS485	1
Function		General	
Authentication Mode	Face Face + temperature measurement	Power Supply	DC12V / 2A
Face Recognition Distance	0.3 to 1.5m	Power Consumption	Max 20W
Face Anti-Spoofing	Support	Working Temperature	16℃ ~ 40℃ (60.8°F ~ 104°F) No airflows indoor (notes for details)
Audio Prompt	Support	Working Humidity	0~90%, no condense
Face Recognition Accuracy	≥99%	Salt spray	Rp6 above
Face Recognition Time	< 0.5 s	Antistatic	Contact ±6KV, air ±8KV
Face Image Capacity	24,000	Dimensions	252(L) × 136(W) × 26(H)mm
Record Capacity	160,000 event capacity	Column Aperture	36mm
Web Configuration	Yes	Weight	1.7 kg
Remote Update	Supported		
Deployment	Support WAN/LAN		